



美亚股份净水器产品目录

美亚股份净水器产品目录

MAYER

Catalogue of water purifiers



美亚官网



美亚公众号

☎ 电话: 400-833-0001

🌐 网址: www.mayer888.com

📍 地址: 广州市黄埔区永和大道38号

目录

Contents

饮用水净化系统

Drinking Water Filtration System

- P01

反渗透净水机
Reverse Osmosis
Filtration System
- P14

立式直饮机
Free Standing Dispenser
- P17

多级净水器
Ultra Filtration System
- P18

龙头式净水器
Faucet Mount Filter
滤水壶
Pitcher
- P19

单管净水器
Under Sink Single Filter
沐浴过滤器
Shower Filter
- P22

橱下型加热器
Under-sink Water Heater

全屋净化系统

POE Filtration System

- P25

全屋智能软水机
Water Softener
- P27

入户前置过滤
High Capacity Whole House
Filter

商用净化系统

Commercial Water Purification System

- P29

商用反渗透系统
Commercial RO System

滤瓶组件

Housings

- P31

EG / 2040 / GXWW38-GN /
N1050LBPR-NP / HT34 / APC 滤瓶

EG / 2040 / GXWW38-GN /
N1050LBPR-NP / HT34 / APC
Filter Housings

滤芯组件

Cartridges

- P34

K1系列滤芯
K1 Series Filter
- P35

K2系列滤芯
K2 Series Filter
- P39

快接式滤芯
Pipe Filter
- P41

反渗透膜
RO Membranes
- P42

聚丙烯熔喷滤芯
Melt-blown PP
Sediment Cartridges

椰壳颗粒活性炭滤芯
Granular Coconut
Activated Carbon Cartridges
- P43

炭棒滤芯
Carbon Block Cartridges
阴离子交换树脂滤芯
Ion Exchange
Resion Cartridge
- P44

圣烛型陶瓷滤芯
Candle Type Cartridge
- P46

专用替换滤芯
Special Replacement Filter

零配组件

Accessories

- P47

压力储水桶
Pressure Storage Tank
- P48

鹅颈水龙头
Faucets
扳手 Wrecch
- P49

安装套件 Accessories
控制类 Control Valve

RO反渗透净水机 Reverse Osmosis Filtration System




型号：KFRO0500U-F1

RO反渗透净水机 Reverse Osmosis Filtration System

F1

- 500G即滤即饮，畅享新鲜
- 双芯合一增强净化
- 一键复位独立提醒
- 净水 / 纯水按需切换
- 集成水路降低漏水风险
- 滤芯专利止水结构，盲装无需断水
- 500 gallon per day system, enjoys fresh drinking water at your finger tip.
- Dual function pre-filter, integration enhances purification.
- Filter exchange reminder with one-button reset.
- Pure/purified water switch for different usage selection.
- Chassis comes with integrated waterway to reduce the risk of leakage.
- Patented filter shut off design, no need to shut off inlet water while filter exchange.

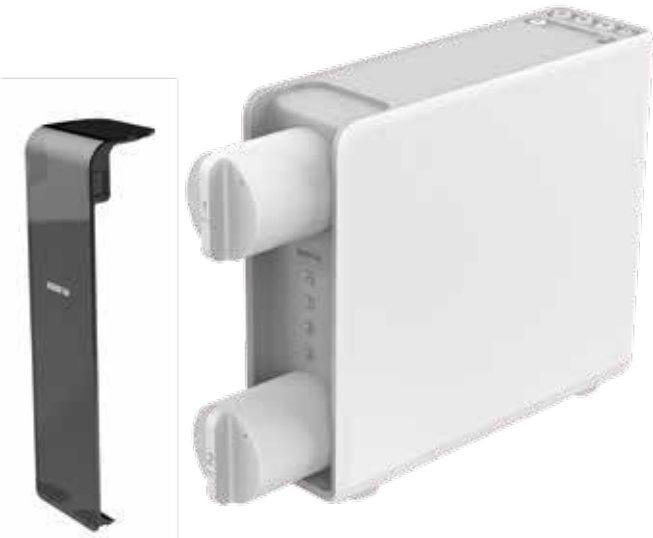

配用滤芯 Cartridge Type

PCF3in1 聚丙烯炭棒复合滤芯 201-5112H
RO 反渗透膜 201-3713H
3 in 1 multi-function cartridge-carbon block + PP x 2 201-5112H
RO reverse osmosis membrane filter 201-3713H

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	工作压力 Work Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	50W	净水 Clean water 2.0L/min 纯水 Pure water 1.3L/min	净水 Clean water 1500L 纯水 Pure water 4000L	0.4-0.9MPa	3/8" 1/4"	448*140*393mm

RO反渗透净水机 Reverse Osmosis Filtration System



型号: KFRO0400U-F1

RO反渗透净水机 Reverse Osmosis Filtration System

F2

- 2道4级过滤，多重净化，即滤即饮
- 双止水专利技术，轻松换芯，安全可靠
- 超静音马达，营造舒适家居环境
- 智能换芯提醒，一键复位更省心
- 2 stage filter integrated with 4 filtering technologies, multi-functional design to provide compact yet thorough output.
- Patented “Double shut-off” design, no need to shut off the inlet water while exchanging filters. Easy & reliable.
- Low noise booster pump.
- Smart filter exchange reminder with one button reset.



配用滤芯 Cartridge Type

- PCF3in1 聚丙烯炭棒复合滤芯 201-5112H
- RO 反渗透膜 201-3613H
- 3 in 1 multi-function cartridge-carbon block + PP x 2 201-5112H
- RO reverse osmosis membrane filter 201-3613H

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	工作压力 Work Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	50W	净水 Clean water 2.0L/min 纯水 Pure water 1.0L/min	净水 Clean water 1500L 纯水 Pure water 4000L	0.4-0.9MPa	3/8" 1/4"	440*130*395mm



中国外观设计专利号：ZL201830598314.5
型号：KFRO0600UTC-A600

RO反渗透净水机 Reverse Osmosis Filtration System

A600

- 自主换芯，轻松DIY
- 智能冲洗，及时洁净更舒心
- 高承压一体成型集成水路，减少漏水
- 超静音运行
- DIY cartridge exchange design, twist and lock filter exchange.
- Auto flushing design to increase the life span of RO membrane.
- Chassis with integrated waterway to reduce the risk of leaks.
- Low noise booster pump.



配用滤芯 Cartridge Type

- PP+CB 聚丙烯炭棒复合滤芯 191-5112H
- RO 反渗透膜滤芯 191-3813H
- GAC 椰壳颗粒活性炭滤芯 191-1319H
- PP + carbon block composite filter 191-5112H
- RO reverse osmosis membrane filter 191-3813H
- GAC coconut shell granular activated carbon filter 191-1319H

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	工作压力 Work Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	95W	1.5L/min	2500L	0.4-0.9MPa	3/8" 1/4"	248*248*460mm

RO反渗透净水机 Reverse Osmosis Filtration System

C400

- 食品级材料，好芯滤好水
- 智能冲洗，及时洁净更舒心
- 无桶储水，即滤即饮
- 超静音马达，稳定运行
- Food graded materials for all water contact parts.
- Auto flushing design to increase the life span of RO membrane.
- High output RO membrane, remove the bulky water tank.
- Low noise booster pump.



配用滤芯 Cartridge Type

- PP+CB 聚丙烯炭棒复合滤芯 191-5112
- RO 反渗透膜滤芯 191-3610
- GAC 椰壳颗粒活性炭滤芯 191-1319
- PP + carbon block composite filter 191-5112
- RO reverse osmosis membrane filter 191-3610
- GAC coconut shell granular activated carbon filter 191-1319

中国外观设计专利号：ZL201830599207.4
型号：KFRO0400UTC-C400

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	工作压力 Work Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	75W	1.0L/min	4000L	0.4-0.9MPa	3/8" 1/4"	344*125*417mm

桌上型免安装净饮机 Desktop Type Free Net Drink Machine



KFRO3-CT508

- 灵活触屏，插电即用，任意摆放
- RO系统三级过滤，智享纯净
- 轻松换芯，省心省事
- 8L超大水箱，满足多人饮水需求
- 厚膜技术，即热快速出水
- Counter top design, plug & use, without hassle installation and annoying setup.
- Touch screen panel for easy use.
- Easy DIY cartridge exchange.
- 8 L large capacity water tank for small office use.
- Advanced instant heating technology, heat the water at your finger tip.

配用滤芯 Cartridge Type

CB 炭棒滤芯 191-1210

RO 反渗透膜 191-3010

GAC 颗粒活性炭滤芯 194-1319

Integrated carbon rod filter 191-1210

Integrated reverse osmosis membrane 191-3010

Integrated granular activated carbon filter 194-1319



额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Flow Rate	出水流量 Clean Water Flow	额定总净水量 Rated Capacity	水箱容量 Tank Capacity	整机尺寸 Dimension
220V~ 50Hz	2100 W	0.13L/min	热水 Hot 0.4L/min 常温水 Room 1L/min	1500L	8L	472*212*407mm

RO反渗透净水机 Reverse Osmosis Filtration System



KFRO0100A-B6

- 涉水部件选用食品级原料，安全卫生
- 机器采用集成水路设计，减少漏水风险
- 抛弃式滤芯设计，可轻松自主更换滤芯
- 滤芯寿命灯显提醒，可实时了解滤芯到期情况
- 标配3.0加仑储水桶
- Food graded materials for all water contact parts.
- One piece pipping circuit manifold, reduce the chance of leakage.
- Disposable filter cartridge design for client to exchange easily.
- Filter change reminder to indicate cartridge life.
- 3.0 gallon storage tank.

配用滤芯 Cartridge Type

PP 5微米 熔喷聚丙烯滤芯 191-5012

CB 炭棒滤芯 191-1212

RO 100加仑反渗透膜 191-3210

GAC 颗粒活性炭滤芯 201-1319B

5 micron PP cartridge 191-5012

Carbaon block cartridge 191-1212

100G RO membrane 191-3210

Post in line granular activated carbon cartridge 201-1319B

产品型号 Product Number	额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
KFRO0100A-B6	220V~ 50Hz	30W	0.26 L/min	2000L	5-38℃	0.1-0.4MPa	1/4 "	378*130*425mm
KFRO0050A-B6	-	-	0.13 L/min	1800L	5-38℃	0.1-0.4MPa	1/4 "	378*130*425mm

RO反渗透净水机 Reverse Osmosis Filtration System



KFRO0400U-D1

- 400G大通量即滤即饮
 - 一体式水路降低漏水风险
 - 抛弃式滤芯设计，可轻松自主更换滤芯
 - 双级滤芯增强多重净化
 - 滤芯独立提醒一键复位
- 400 GPD RO element, no storage tank needed.
 - One piece pipping circuit manifold, reduce the chance of leakage.
 - Disposable filter cartridge design for client to exchange easily.
 - Dual function cartridges for best performance.
 - Filter change reminder with “fast reset” button.

配用滤芯 Cartridge Type

PCF3in1 聚丙烯炭棒复合滤芯 201-5112	PP/Activated carbon block compound filter 201-5112
RO 400加仑反渗透膜 201-3610	400G RO membrane 201-3610

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	55W	1.0 L/min	2000L	5-38℃	0.1-0.4MPa	3/8"	419*171*422mm

RO反渗透净水机 Reverse Osmosis Filtration System



KFRO1000A-1

- 双支500G大通量，即滤即饮
 - 抛弃式滤芯设计，可轻松自主更换滤芯
 - 无桶、无泵、无电、无噪音设计，使用更舒心
 - 净水流量达到1.5L/min，进水压力需要>0.4MPa，若市政供水达不到此压力，需要另配增压泵
- Two 500 GPD RO elements to provide good premeate flow.
 - Disposable filter design, easy DIY replacement.
 - No tank, no booster, so there’ s no electricity & noise with system running.
 - When the clean water flow reaches 1.5L/min, the work pressure needs to be > 0.4MPa. If the tap water supply fails to reach this pressure, additional booster pump is required.

配用滤芯 Cartridge Type

PP+CB 聚丙烯炭棒复合滤芯 178-2001	PP Activated carbon cartridge 178-2001
RO 500加仑反渗透膜 178-2002	500G RO membrane 178-2002
RO 500加仑反渗透膜 178-2003	500G RO membrane 178-2003
GAC 后置活性炭滤芯 178-2004	Post in line granular activated carbon cartridge 178-2004

净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水压力 Work Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
1.5 L/min (0.4MPa)	4000L	0.2-0.8MPa	进水3/8" 出水1/4"	395*180*453mm

RO-B-3-400



- 水质时刻监控，智能提醒换芯
 - 无桶储水，即滤即饮
 - 自动冲洗，整机寿命延长
 - 专属漏水保护，安全可靠
- Safety: Water quality monitoring, intelligent reminder replacement.
 - No water storage tank, fresh made product water at your finger tip.
 - User-Friendly Design: Automatic flushing, extended lifeframe for easy filter changing.
 - Exclusive water leakage protection, safe and reliable.

配用滤芯 Cartridge Type

PP 5微米 熔喷聚丙烯滤芯 PS05-A-3020-NJ	5 micron PP cartridge PS05-A-3020-NJ
GAC 颗粒活性炭滤芯 171-1389	Granular activated carbon cartridge 171-1389
PP 1微米 熔喷聚丙烯滤芯 PS01-A-3020-NJ	1 micron PP cartridge PS01-A-3020-NJ
RO 400加仑反渗透膜 KF167-2812-400D	400G RO membrane KF167-2812-400D
AICRO 后置活性炭滤芯 171-1356	Post in line granular activated carbon cartridge 171-1356

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	72W	1.0 L/min	3000L	5-38℃	0.1-0.4MPa	进水3/8" 出水1/4"	420*215*480mm

RO反渗透净水机 Reverse Osmosis Filtration System



RO-B-3-50

- 涉水部件选用食品级原料，安全卫生
 - 精巧防尘盖，美观、安全、易清洁
 - 橱下型安装，节省空间
 - 标配3.0加仑储水桶
- Water-related components use food-grade raw materials, safe and sanitary.
 - Compact dust cover, beautiful, safe and easy to clean.
 - Cabinet type installation saves space.
 - Come with 3 gallon storage tank.

配用滤芯 Cartridge Type

- PP 5微米 熔喷聚丙烯滤芯 PS05-A-3020-NJ

GAC 颗粒活性炭滤芯 171-1389

PP 1微米 熔喷聚丙烯滤芯 PS01-A-3020-NJ

RO 50加仑反渗透膜 KF167-1812-50D

GAC 后置活性炭滤芯 171-1356
- 5 micron PP cartridge PS05-A-3020-NJ

Granular activated carbon cartridge 171-1389

1 micron PP cartridge PS01-A-3020-NJ

50G RO membrane KF167-1812-50D

Post in line granular activated carbon cartridge 171-1356

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	36W	0.15 L/min	2000L	5-38℃	0.1-0.4MPa	1/4 "	374*473*190mm



KFRO0050UTC-B1 / KFRO0050UTC-B2

- 定时冲洗日产水量50加仑(B1)
 - 自动冲洗日产水量50加仑(B2)
 - 超静音马达、运行稳定
 - 标配3.0加仑储水桶
- 50G RO with flush regularly (B1).
 - 50G RO with auto flushing (B2).
 - Quiet and stable pump operation.
 - Come with 3 gallon storage tank.

配用滤芯 Cartridge Type

- PP 5微米 熔喷聚丙烯滤芯 PS05-A-3020-NJ

GAC 颗粒活性炭滤芯 171-1389

PP 1微米 熔喷聚丙烯滤芯 PS01-A-3020-NJ

RO 50加仑反渗透膜 KF167-1812-50D

GAC 后置活性炭滤芯 171-1356
- 5 micron PP cartridge PS05-A-3020-NJ

Granular activated carbon cartridge 171-1389

1 micron PP cartridge PS01-A-3020-NJ

50G RO membrane KF167-1812-50D

Post in line granular activated carbon cartridge 171-1356

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	36W	0.15 L/min	2000L	5-38℃	0.1-0.4MPa	1/4 "	365*190*485mm

RO反渗透净水机 Reverse Osmosis Filtration System



KFRO0050UTC- B4

KFRO0050UTC-B3 / KFRO0050UTC-B4

- 涉水部件选用食品级原材料，安全卫生
 - 手动冲洗日产水量50加仑(B3)
 - 微电脑控制冲洗日产水量50加仑(B4)
 - 超静音马达、运行稳定
 - 标配4.0加仑储水桶
- Safety: Food grade materials for all wet parts.
 - 50G RO with flushing.(KFRO0050UTC-B3)
 - 50G RO with control box.(KFRO0050UTC-B4)
 - Quiet and stable pump operation.
 - Come with 4 gallon storage tank.

配用滤芯 Cartridge Type

- PP 5微米 熔喷聚丙烯滤芯 PS05-A-3020-NJ

GAC 颗粒活性炭滤芯 171-1389

PP 1微米 熔喷聚丙烯滤芯 PS01-A-3020-NJ

RO 50加仑反渗透膜 TW30-1812-50

GAC 后置活性炭滤芯 171-1356
- 5 micron PP cartridge PS05-A-3020-NJ

Granular activated carbon cartridge 171-1389

1 micron PP cartridge PS01-A-3020-NJ

50G RO membrane TW30-1812-50

Post in line granular activated carbon cartridge 171-1356

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	36W	0.15 L/min	2000L	5-38℃	0.1-0.4MPa	1/4 "	360*190*460mm



KFRO0050UTC-B5

- 涉水部件选用食品级原材料，安全卫生
 - 智能微电脑控制冲洗日产水量50加仑
 - 超静音马达、运行稳定
 - 标配3.0加仑储水桶
- Safety: Food grade materials for all wet parts.
 - 50G RO with control box.
 - Quiet and stable pump operation.
 - Come with 3 gallon storage tank.

配用滤芯 Cartridge Type

- PP 5微米 熔喷聚丙烯滤芯 PS05-A-3020-NJ

GAC 颗粒活性炭滤芯 171-1389

PP 1微米 熔喷聚丙烯滤芯 PS01-A-3020-NJ

RO 50加仑反渗透膜 TW30-1812-50

GAC 后置活性炭滤芯 171-1356
- 5 micron PP cartridge PS05-A-3020-NJ

Granular activated carbon cartridge 171-1389

1 micron PP cartridge PS01-A-3020-NJ

50G RO membrane TW30-1812-50

Post in line granular activated carbon cartridge 171-1356

额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	36W	0.15 L/min	2000L	5-38℃	0.1-0.4MPa	1/4 "	375*195*485mm

RO反渗透净水机 Reverse Osmosis Filtration System

KFRO0400A-16N

- 智能冲洗，及时洁净更舒心
- 无桶储水，即滤即饮
- 食品级材料，好芯滤好水
- Automatic RO flushing control, increase the life span of RO membrane.
- No water storage tank needed, fresh drinking water at your finger tip.
- Food graded material to all water contact parts.

配用滤芯 Cartridge Type

- PP 5微米 熔喷聚丙烯滤芯 F5633PPW-BOX
- GAC 颗粒活性炭滤芯 F5633CW-BOX
- RO 200加仑反渗透膜 RO-NCM-2012
- RO 200加仑反渗透膜 RO-NCM-2012
- AF 氧化铝炭纤维炭纸复合滤芯 AIDRO-10-KF
- 5 micron PP cartridge F5633PPW-BOX
- Granulaar activiated carbon cartridge F5633CW-BOX
- 200G RO membrane RO-NCM-2012
- 200G RO membrane RO-NCM-2012
- Post in line granular activated carbon cartridge AIDRO-10-KF



额定电源 Rated Voltage	额定功率 Rated Power	净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
220V~ 50Hz	72W	1.0 L/min	3000L	5-38℃	0.1-0.4MPa	1/4 "	426*200*466mm


立式直饮机 Free Standing Dispenser

KFRO0050F-E1

- 一键操作，触感敏锐
- 深度过滤，确保饮水口感
- 三种温度自由切换
- 滤芯独立提醒，一键复位
- 贴心保护漏水及童锁设计
- Touch Panel Control.
- Dispenser with filtration function to ensuer safe water.
- Tri-temp selection .
- Individual filter cartrdge capacity reminder with reset.
- Leak protection & hot water child safe lock.

配用滤芯 Cartridge Type

- CB 炭棒滤芯
- RO 50加仑反渗透膜
- GAC 颗粒活性炭滤芯
- Integrated carbon rod filter
- 50G RO membrane
- Granulaar activiatedcarbon cartridge

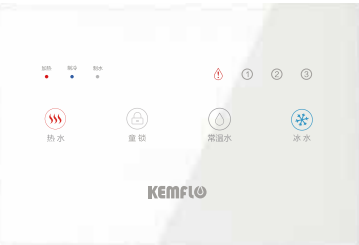

操控界面 Control Interface




配用滤芯 Cartridge Type

额定功率 Rated Power	制热能力 Heating Capacity	制冷能力 Colding Capacity	热胆容量 Hot Water Tank Capacity	冷胆容量 Cold Water Tank Capacity	净水流量 Clean Water Flow
1000W	≥7 L/h	≥0.5 L/h	5 L	0.8 L	0.13 L/min

工作压力 Working Pressure	储水箱容量 Tank Capacity	原水水质 Water Source	进水温度 Inlet Temp	进水压力 Inlet Pressure	产品尺寸 Dimension
0.4-0.8MPa	9 L	市政自来水 Tap Water	5-38℃(41-100.4°F)	0.1-0.4MPa	369*332*1299mm

立式直饮机 Free Standing Dispenser

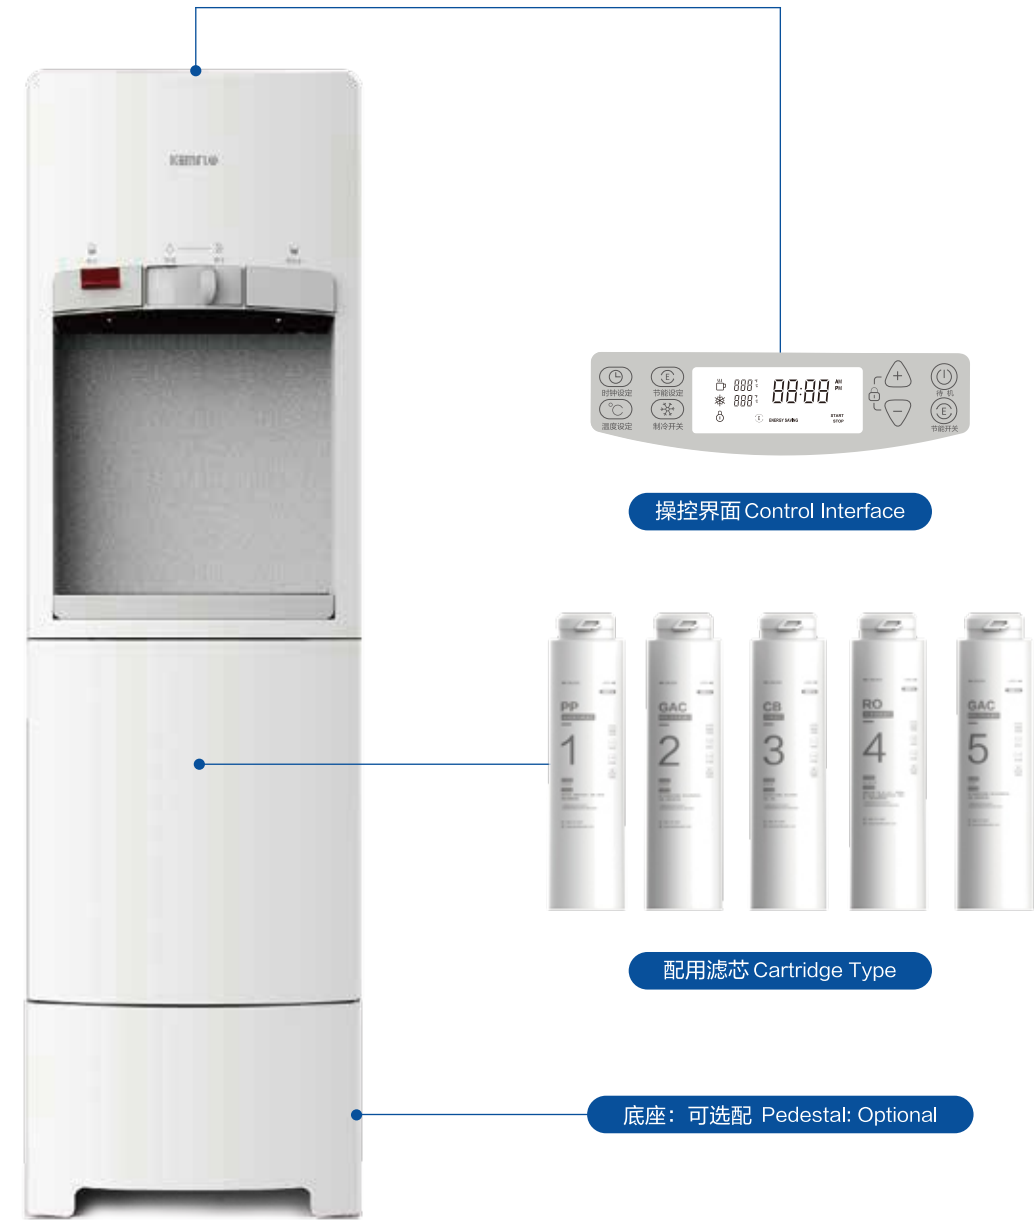

YLR3-6-KFL-635

- 涉水部件选用食品级原材料，安全卫生
- 卡式旋转滤芯设计，安装更换简便
- 超静音马达，运行稳定
- 三段式温控调节专利技术
- 独特内胆结构，完全杜绝串温
- 简约外观，炫蓝色LCD操控面板
- 双重热水保护按钮防止幼儿烫伤
- Safety: Food grade materials for all wet parts.
- Quick-change cartridge, simple operation.
- Quite and stable pump operation.
- Adjustable temperature control: cold, ambient and hot.
- Unique tank design keeps hot water hot and cold water cold.
- Unique tank design to prevent hot water quick mixed with cold inlet water.
- Hot water child safety lock.

配用滤芯 Cartridge Type

- PP 5微米 熔喷聚丙烯滤芯 191-5012
- GAC 颗粒活性炭滤芯 191-1319A
- CB 压缩活性炭滤芯 191-1210A
- RO 50加仑反渗透膜 191-3010A
- GAC 后置活性炭滤芯 191-1319B
- 5 micron PP cartridge 191-5012
- Granular activated carbon cartridge 191-1319A
- Carbaon block cartridge 191-1210A
- 50G RO membrane 191-3010A
- Post in line granular activated carbon cartridge 191-1319B

产品名称 Product Name	直饮机 (热水/冷水/常温水) Water Dispenser (Hot, Ambient, Cold)	管线机 (热水/冷水/常温水) Water Dispenser (Hot, Ambient, Cold)	管线机 (热水/冷水) Water Dispenser (Hot,Cold)
产品型号 Product Number	YLR3-6-KFL-635	YLR3-6-KFL-CB	YLR3-6-KFL-DX
额定功率 Rated Power	570 W	550 W	450 W
制热能力 Heating Capacity	≥ 4.0 L/h	≥ 4.0 L/h	≥ 4.0 L/h
制冷能力 Colding Capacity	0.8 L/h	0.8 L/h	—
热胆容量 Hot Water Tank Capacity	1.1 L	1.1 L	1.1 L
冷胆容量 Cold Water Tank Capacity	1.2 L	1.2 L	—
储水箱容量 Tank Capacity	4.5 L	4.5 L	5.7 L
原水水质 Water Source	市政自来水 Tap Water	净化水 Filtered Water	净化水 Filtered Water
进水温度 Inlet Temp	5-38℃(41-100.4°F)	5-38℃(41-100.4°F)	5-38℃(41-100.4°F)
进水压力 Inlet Pressure	0.1-0.4MPa	0.1-0.4MPa	0.1-0.4MPa
产品尺寸 Dimension	320*340*950mm (不含底座)	320*340*950mm (不含底座)	320*340*950mm (不含底座)
净水流量 Flow Rate	0.13L/min	—	—
工作压力 Working Pressure	0.4-0.6MPa	—	—

多级净水器 Ultra Filtration System

KF-WMAF-01



- 造型简洁，不占空间，

· Compact, concise design, save your cabinet space. Choice of
- 可用于橱下、壁挂、桌上型安装

under-the-sink, counter-top and wall-mount 3 different installations.
- 涉水部件选用食品级原料，安全卫生无虞

· Food graded materials for all water contact parts.
- 快插式接头，安装快捷方便

· Quick connection fittings for easy installation.
- 卡式旋转滤芯，更换无需工具，操作简单

· Twist & lock cartridge design for easy cartridge replacement.

配用滤芯 Cartridge Type

- PP 5微米 熔喷聚丙烯滤芯 185-5211-KF

5 micron PP cartridge 185-5211-KF
- GAC 颗粒活性炭滤芯 185-1372-KF

Granular activated carbon cartridge 185-1372-KF
- CB 炭棒滤芯 185-1591-KF

Enhanced carbon block cartridge 185-1591-KF
- AF 氧化铝纤维炭纸复合滤 芯 185-1088

Alumina fibre carbon composite cartridge 185-1088

产品型号 Product Number	净水流量 Flow Rate	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	产品尺寸 Dimension
KF-WMAF-01	2.0 L/min	3000L	5-38℃	0.1-0.4MPa	1/4 "	386*110*375 mm

KF-WMAF-02



- 4级过滤，滤出完美净水

· 4 stage filtration to bring you clean & fresh drinking water.
- 抛弃式滤芯设计，可轻松自主更换滤芯

· Disposable filter cartridge design for client to exchange easily.
- 滤芯寿命灯显提醒，可实时了解

· Filter change reminder to indicate cartridge life.
- 滤芯到期情况

· 3.0 gallon storage tank.
- 涉水部件选用食品级原料，安全卫生无虞

· Food graded materials for all water contact parts.

配用滤芯 Cartridge Type

- PP 5微米 熔喷聚丙烯滤芯 191-5012

5 micron PP cartridge 191-5012
- CB 炭棒滤芯 191-1212

Carbaon block cartridge 191-1212
- GAC 颗粒活性炭滤芯 201-1319A

Granular activated carbon cartridge 201-1319A
- AF 氧化铝炭纸复合滤芯 191-8011

Aluminum fiber with granular carbon composite media 191-8011

产品型号 Product Number	净水流量 Flow Rate	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	产品尺寸 Dimension
KF-WMAF-02	2.0 L/min	3000L	5-38℃	0.1-0.4MPa	1/4 "	378*124*416 mm

便携式净水器 Portable Water Purifier

滤水壶 Pitcher
PT-CG3000 / PT-CG3001



椰炭/树脂 滤芯
173-1802

- 透明壶身易清洗，便于观察水位，方便使用

· LED滤芯寿命显示，及时提醒滤芯更换
- Transparent body: easy to see through and easy for cleaning.

· LED filter service life reminder.

配用滤芯 Cartridge Type

- 椰炭+树脂复合滤芯 173-1802

Carbon block cartridge + Resin 173-1802

产品型号 Product Number	净水流量 Flow Rate	使用寿命 Capacity	滤芯寿命提示器 Timer	产品尺寸 Dimension
PT-CG3000	0.2 L/min	200 L	√	250*130*250 mm
PT-CG3001	0.2 L/min	200 L	—	250*130*250 mm

龙头式净水器 Faucet Mount Filter
KFAF-FM15W



氧化铝纤维
炭纸复合 滤芯
988-295D00-1901N

- 全新一代复合滤芯，滤出完美净水

· 抛弃式滤芯设计，取消二次污染隐患
- 双出水设计，净水/原水自由切换

· 更小更轻，安装简单便捷

- New generation composite filter to perform

multi-function filtration in a small body.
- Switch between the inlet/purified water.

· Disposable cartridge design.
- Small and light, easy installation.

配用滤芯 Cartridge Type

- 氧化铝纤维炭纸复合滤芯 988-295D00-1901N

Alumina fibre carbon composite cartridge 988-295D00-1901N

净水流量 Flow Rate	使用寿命 Capacity	工作压力 Working Pressure	产品尺寸 Dimension
2.0 L/min	800L	0.1 - 0.4Mpa	147*140*66 mm

单管净水器 Single Stage Filter



KFDC-WM16NW-KF

- 体积小巧，不占空间，可装置于厨房或浴室等场所
- 自带断水阀，滤芯更换无需关闭进水
- 内含独特配方，有效去除部分重金属
- Compact design, fit in kitchen sink, wash room, etc.
- Build-in shut-off diverter, no need to turn off the water supply when change filter.
- Unique formula, reduce some heavy metals.

配用滤芯 Cartridge Type

AF+CB 氧化铝纤维炭纸复合滤芯 5095596N001
Aluminum fiber with granular carbon composite media 5095596N001

净水流量 Clean Water Flow	额定总净水量 Rated Capacity	进水温度 Inlet Temp	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	产品尺寸 Dimension
1.5 L/min	1500L	5-38℃	0.1-0.4MPa	3/8"	101*93*385mm

沐浴过滤器 Shower Filter



KF-SHWR-KDF55

- 专为洗浴用水设计
- 有效预防皮肤过敏，皮炎湿疹
- 有效预防头发干枯毛躁、易开叉脱落，生头屑
- Unique design only for Shower.
- Effective prevention of skin allergy, inflammation and eczema.
- Effective prevention of dry and frizz hair, dandruff and hair loss.

配用滤芯 Cartridge Type

KDF滤芯 KF-SHWR-F
KDF KF-SHWR-F

原水水质 Water Source	使用寿命 Capacity	产品尺寸 Dimension
市政自来水 Tap Water	8 - 12个月	85*85*140 mm

橱柜下型加热器 Under-sink Water Heater



KF-HTS3002

- 迅速提供热水，可将水温加热至95℃
- 内胆采用食品级不锈钢304材质永不生锈，既安全卫生又坚固耐用
- 防漏电与多重防干烧保护设计，安全可靠
- 热水温度可调节，满足不同温度需求
- 加厚聚氨酯保护层，保温性能高，节能环保
- Supply hot water from under-the-sink . Water temp. upto 95℃.
- Heat tank uses SS 304 material, robust and durable.
- Electricity leak protection and heat tank dry run prevention.
- Adjustable hot water temperature.
- Enhanced insulation material helps holding the temperature and save.

额定电源 Rated Voltage	额定功率 Rated Power	出水流量 Clean Water Flow	热胆容量 Hot Water Tank Capacity	进出水口径 Inlet / Outlet	进水压力 Inlet Pressure	进水水质 Water Source	整机尺寸 Dimension
220V~ 50Hz	780W	2.0 L/min	2.3 L	进水1/4" 出水 ϕ9.5mm	0.1 - 0.3MPa	净化水 Filtered water	190*190*300mm

橱下型加热器 Under-sink Water Heater



智能龙头交互界面

智能龙头

(有滤芯版)

橱下型加热器 Under-sink Water Heater

KF-HTS4001 (无滤芯版)

- 专利冷热多温智能龙头
- 3L持续放流保证恒温热水
- 四重防干烧设计，安全童锁保护
- 食品级304真空保温内胆
- 300°龙头旋转，安装便捷
- 可定制含过滤系统的机型
- 过滤系统模块化设计
- Patented Hot & Cold smart multi-temp faucet.
- 3L tank with continuous flow at designated temperature.
- Dual heat tank dry run prevention.
- SS 304 heat tank with vacuum thermal insulation.
- 300° degree rotation faucet, easy installation.
- Custom offer model to be used with RO / Filtration systems.
- Modular design of filtration system.



(无滤芯版)



配用滤芯 Cartridge Type

AF 氧化铝纤维滤芯 Aluminum fiber filter

CB 炭纤维滤芯 Integrated carbon rod filter

额定电源 Rated Voltage	额定功率 Rated Power	热水流量 Clean Water Flow	冷水流量 Cold Water Flow	热胆容量 Hot Water Tank Capacity	进出水口径 Inlet / Outlet	进水压力 Inlet Pressure	进水水质 Water Source	整机尺寸 Dimension
220V~ 50Hz	750W	> 2.5 L/min	取决于搭配的净水机 It depends on the water purifier	4.0 L	进水1/4" 出水φ 9mm	0.1 – 0.4MPa	净化水 Filtered water	315*226*356mm

全屋净化系统 / POE

享受软水带来的健康生活 Enjoy a healthier life with softening water



KFSF080-Plus



KFSF060-Plus

KFSF080-Plus / KFSF060-Plus

- 智能控制阀，一次调试，后期自动运行
 - 大流量，出水稳定，满足全屋用水需求
 - 加固旁通阀设计，自由切换软/硬水
 - LED灯显，操作轻松设定
 - 超长数据记忆，断电依然保存设置信息
 - 食品级材质，坚固耐用
- Smart control valve. Once setup , runs automatically.
 - High and stable water output for whole house use.
 - Bypass valve to let user switch between original & soft water, and to keep raw water supplied while system is in maintenance.
 - LED display, easy to operate.
 - Keep operation data after power breakage.
 - Food grade material, safe and durable.

产品型号 Product Number	树脂容量 Resion Capacity	净水流量 Flow Rate	额定功率 Rated Power	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
KFSF060-Plus	10 L	13 L/min	10.8 W	0.1-0.4MPa	3/4 " BSPT	410*479*555mm
KFSF080-Plus	14.5 L	16 L/min	10.8 W	0.1-0.4MPa	3/4 " BSPT	410*479*825mm



KFSF080



KFSF060

KFSF080 / KFSF060

- 采用美国原装进口智能控制阀
 - 流量控制再生，省水省电
 - LED操作显示，三步轻松设定
 - 超长数据记忆，断电依然保存设置信息
 - 独特掀盖设计，优化操作，维护便捷
 - 食品级材质，坚固耐用
- Imported control valve.
 - Demand regeneration, system regenerate only when capacity is up. Saves salt and water.
 - LED display control, 3 steps setup.
 - Keep operation data after power breakage.
 - Flip cover to optimize operation & salt handling.
 - Food grade materials, safe and duable.

产品型号 Product Number	树脂容量 Resion Capacity	净水流量 Flow Rate	额定功率 Rated Power	进水压力 Inlet Pressure	进出水口径 Inlet / Outlet	整机尺寸 Dimension
KFSF060	9 L	10 L/min	6 W	0.1-0.4MPa	3/4 " BSPT	324*446*482mm
KFSF080	13 L	15 L/min	6 W	0.1-0.4MPa	3/4 " BSPT	324*446*700mm

入户前置过滤 High Capacity Whole House Filter



KFWH40L-L

- 采用高品质的食品级材质、使用安全
 - 多种滤芯可供选择，超大流量实现全屋净化
 - 标配滤瓶扳手，安装方便快捷
 - 利用自来水压力提供动力，不耗电，节能环保
 - 泄压按钮让滤芯更换更轻松
 - 三向阀控制，原水、过滤水和关闭三重选择
- Product material is food grade to ensure safety.
 - Many options of filters for high flow whole house filtration.
 - Supplied with filter w rench for easy installation.
 - Use water pressure for filtration without power consumption, very eco-friendly.
 - Pressure release button for easy filter replacement.
 - Three-way valve controller: raw water, filter water and shut-off.


产品型号 Product Number	进出水口径 Inlet / Outlet	包装 Package	尺寸 Dimensions
KFWH40L-L	1 "BSP (约25.4 mm)	4 Pcs	183*213*413mm

KFWH04F

- 
 - 采用高品质的食品级材质，使用安全
 - 多种滤芯可供选择，超大流量实现全屋净化
 - 标配滤瓶扳手，安装方便快捷
 - 利用自来水压力提供动力，不耗电，节能环保
 - 标配滤芯寿命指示器，提醒更换滤芯
 - 泄压按钮让滤芯更换更轻松
- Product material is food grade to ensure safety.
 - Many options of filters for high flow whole house filtration.
 - Supplied with filter w rench for easy installation.
 - Use water pressure for filtration without power consumption, very eco-friendly.
 - Supplied with filter service life monitor to remind consumers to replace filters.
 - Pressure release button for easy filter replacement.

产品型号 Product Number	进出水口径 Inlet / Outlet	包装 Package	尺寸 Dimensions
KFWH04F	3/4"NPT (约19.05mm)	8 Pcs	120*120*310mm

入户前置过滤 High Capacity Whole House Filter

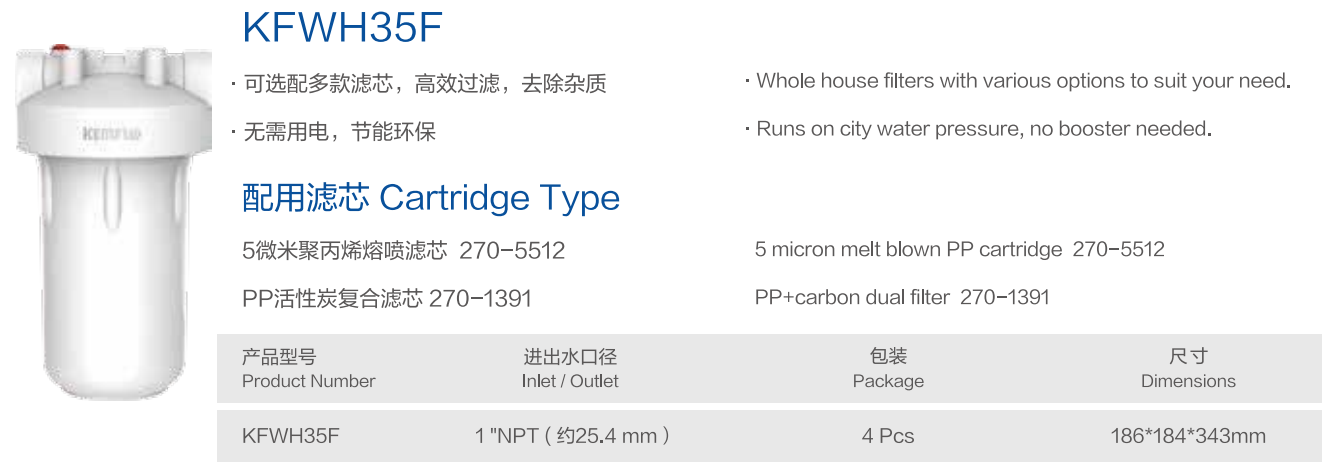

KFWH35F

- 可选配多款滤芯，高效过滤，去除杂质
 - 无需用电，节能环保
- Whole house filters with various options to suit your need.
 - Runs on city water pressure, no booster needed.
- 配用滤芯 Cartridge Type

5微米聚丙烯熔喷滤芯 270-5512

PP活性炭复合滤芯 270-1391
- 5 micron melt blown PP cartridge 270-5512

PP+carbon dual filter 270-1391


产品型号 Product Number	进出水口径 Inlet / Outlet	包装 Package	尺寸 Dimensions
KFWH35F	1 "NPT (约25.4 mm)	4 Pcs	186*184*343mm

KFN滤瓶

- 
 - 涉水部件采用食品级材质
 - 多种滤芯可供选择，超大流量实现全屋净化
- Food grade materials for all water contact parts.
 - Whole house filters with various options to suit your need.

产品型号 Product Number	进出水口径 Inlet / Outlet	包装 Package	扳手 Wrench	吊片 Brackets	尺寸 Dimensions
KFNWW38-NJ	3/8"	6 Pcs	—	—	120*120*335mm
955-540000-0001D	3/8"	6 Pcs	✓	✓	120*120*335mm

商用反渗透系统 Commercial RO System

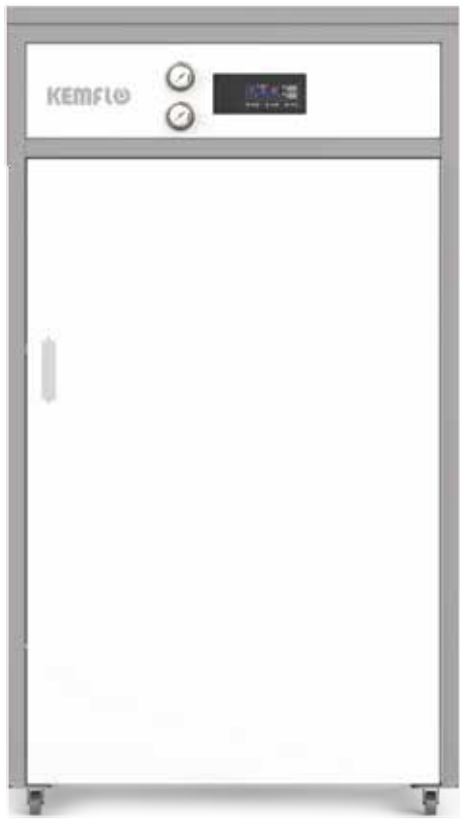

正面效果图
Front view



反面效果图
Back view

RO – 800G / 1200G / 2000G

- 低压保护功能，当原水压力低或停水时，整机停止工作，防止水泵的空转

· 电磁阀配置，整机不工作时自动切断水路，安全放心

· 微电脑自动冲洗功能，更好保护RO膜，延长使用寿命

· 双压力表监测进水和工作压力；且自带TDS检测功能，TDS超标红灯提示，保证出水质量

· 大20寸高流量前置滤芯，超大处理量，更快制水，满足大用水量需求

· 采用高品质的食品级材质、使用安全
- Low inlet pressure protection, shut off system when there’s no incoming water.

· Solenoid valves with smart control system to perform dedicate operation requirements.

· Controller come with RO auto-flushing function to extend membrane’s life span.

· Pressure gauges for incoming and RO membrane pressure monitoring. TDS (total dissolved solids) meter to monitor product water quality.

· 20” high flow, high capacity cartridges to meet commercial need.

· Food grade materials for all water contact parts.

配用滤芯 Cartridge Type

- PP 20 " 20 微米大胖熔喷聚丙烯滤芯 PS20–20BB–GN

GAC 20 " 颗粒活性炭滤芯 GAC–BB20C

PP 20 " 5 微米大胖熔喷聚丙烯滤芯 PS05–20BB–GN

RO 反渗透膜 KF167–2812–400D

GAC 10 " 颗粒活性炭滤芯 171–1389

AF 10 " 氧化铝纤维炭纸复合滤芯 193–8010
- 20 " 20 micron PP cartridge PS20–20BB–GN

20 " Granular activated carbon cartridge GAC–BB20C

20 " 5 micron PP cartridge PS05–20BB–GN

RO membrane KF167–2812–400D

10 " Granular activated carbon cartridge 171–1389

10 " Distuptor cartridge 193–8010

产品型号 Product Number	进出水口径 Inlet / Outlet	净水流量 Flow Rate	额定功率 Rated Power	整机尺寸 Dimension
KFRO0800FS–16N	1/2 " NPT	2.1 L/min	135W	750*500*1360mm
KFRO1200FS–16N	1/2 " NPT	3.15 L/min	200W	750*500*1360mm
KFRO2000FS–16N	1/2 " NPT	5.25 L/min	320W	750*500*1360mm

滤瓶组件

Filter Housing Assembly

超高承压 经久耐用 High water pressure resistant, reliable design

EG滤瓶 EG Filter Housings



产品料号 Part Number	进出水口径 In / outlet	牙口 Threaded	泄压阀 Pressure relief button	滤芯高度 Cartridge	滤瓶颜色 Housing	上盖颜色 Cap	尺寸 Dimensions	包装 Package
EGWW14-GN	1/4 "	NPT	—	9-7/8 "	白色 White	白色 White	290 * 114 mm	12 Pcs
EGWW12-GN	1/2 "	NPT	—	9-7/8 "	白色 White	白色 White	290 * 114 mm	12 Pcs

2040滤瓶 2040 Filter Housings



产品料号 Part Number	进出水口径 In / outlet	牙口 Threaded	泄压阀 Pressure relief button	滤芯高度 Cartridge	滤瓶颜色 Housing	上盖颜色 Cap	尺寸 Dimensions	包装 Package
2040LB12PR-NP	1/2 "	NPT	√	20 "	蓝色 Blue	黑色 Black	580 * 136 mm	6 Pcs
2040LB34PR-NP	3/8 "	NPT	√	20 "	蓝色 Blue	黑色 Black	580 * 136 mm	6 Pcs

GXWW38-GN滤瓶 GXWW38-GNFilter Housings



产品料号 Part Number	进出水口径 In / outlet	牙口 Threaded	滤芯高度 Cartridge	滤瓶颜色 Housing	上盖颜色 Cap	尺寸 Dimensions	包装 Package
GXWW38-GN	3/8"	NPT	9-7/8 "	白色 White	白色 White	305 * 118 mm	6 Pcs

NP滤瓶 NP Filter Housings



产品料号 Part Number	进出水口径 In / outlet	牙口 Threaded	泄压阀 Pressure relief button	滤芯高度 Cartridge	滤瓶颜色 Housing	上盖颜色 Cap	尺寸 Dimensions	包装 Package
N1050LBPR-NP	1"	NPT	√	9-7/8 "	蓝色 Blue	黑色 Black	357 * 185 mm	4 Pcs
N20050LBPR-NP	1"	NPT	√	20"	蓝色 Blue	黑色 Black	610 * 185 mm	4 Pcs

HT34滤瓶 HT34Filter Housings



产品料号 Part Number	进出水口径 In / outlet	牙口 Threaded	滤芯高度 Cartridge	滤瓶颜色 Housing	上盖颜色 Cap	尺寸 Dimensions	包装 Package
HD4500HT34	3/4"	NPT	9-7/8 "	红色 Red	红色 Red	317 * 136 mm	12 Pcs
FH8000HT34	3/4"	NPT	20 "	红色 Red	红色 Red	580 * 136 mm	6 Pcs

*滤瓶最大耐受温度：93℃(200°F)
The highest temperature the filter can take:200°F(93℃)

APC滤瓶 APC Filter Housings



产品料号 Part Number	进出水口径 In / outlet	牙口 Threaded	泄压阀 Pressure relief button	滤芯高度 Cartridge	滤瓶颜色 Housing	上盖颜色 Cap	尺寸 Dimensions	包装 Package
APCLL34PR-NP	3/4"	NPT	√	9-7/8 "	蓝色 Blue	蓝色 Blue	310 * 120 mm	12 Pcs

注 意：
滤瓶最大工作压力：0.68MPa(100psi)
滤瓶最大耐受温度：5-38℃(41-100.4°F)
* 请勿让阳光直射滤瓶。当使用于大楼，楼高以20层为限。超过10层楼的大楼，请勿使用透明滤瓶，因透明材质对水锤效应耐受力差，易造成滤瓶破裂。

NOTE:
The highest pressure the filter can take: 0.68MPa(100psi)
The highest temperature the filter can take: 5-38℃(41-100.4°F)
* Do keep the filter away from the sunshine. Don’ t use the filter in buildings highter than 20th floor. As for the buildings higher than 10th floor, don’ t use the transparent filter to avoid the break. The transparent material has weak tolerance to the water hammer effect.

滤芯组件

Filter Housing Assembly

设计新颖，性能可靠 Super design and reliable performance



K1 聚丙烯熔喷滤芯 K1 Mel-blown PP Sediment Cartridges



产品料号 Part Model	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
185-5211-KF	3.0 L / min	3000 L	295 * ϕ 68 mm	24 Pcs

适用机型 Applicable models: KF-WMAF-01 / KF-WMUF-01 / DW-WMUF-01
滤除效果: 滤除水中泥沙、铁锈，悬浮物等颗粒杂质。
Filter claims: Reduce rust and sediment.

K1 颗粒活性炭滤芯 K1 Carbon Block Cartridges



产品料号 Part Model	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
185-1372-KF	3.0 L / min	3000 L	295 * ϕ 68 mm	24 Pcs

适用机型 Applicable models: KF-WMAF-01 / KF-WMUF-01 / DW-WMUF-01
滤除效果: 滤除水中吸附水中余氯，异色、异味、有机物等，改善水质口感。
Filter claims: Reduce chlorine and bad taste & odor.

K1 炭棒滤芯 K1 Activated Carbon Cartridge



产品料号 Part Model	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
185-1291	3.0 L / min	3000 L	295 * ϕ 68 mm	24 Pcs
185-1591-KF	3.0 L / min	3000 L	295 * ϕ 68 mm	24 Pcs

适用机型 Applicable models: KF-WMAF-01 / KF-WMUF-01 / DW-WMUF-01
185-1291滤除效果: 吸附水中余氯，异色异味、有机物等。
185-1291 Filter claims: Remove chlorine , organic chemical.
185-1591-KF滤除效果: 吸附水中余氯，异色异味、有机物，去除重金属等。
185-1591-KF Filter claims: Remove chlorine , organic chemical,

K1 氧化铝纤维炭纸复合滤芯 K1 Hollow Fiber Cartridges



产品料号 Part Model	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
185-1088	3.0 L / min	3000 L	295 * ϕ 68 mm	24 Pcs

适用机型 Applicable models: KF-WMAF-01
滤除效果: 吸附异色、异味、滤除水中重金属（如铅、汞）、细菌（如大肠杆菌）等有害物质。
Filter claims: Adsorb different colors, odors from water, remove heavy metals (such as lead, mercury), bacteria (such as E. coli) and other harmful substances in water.

K2 聚丙烯炭棒复合滤芯 PP Carbon Composite Cartridges



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-5112H	5 μ m	3.0 L/min	6000 L	293 * ϕ 70 mm	24pcs

适用机型 Applicable models: KFRO0600UTC-A600
滤除效果: 滤除水中泥沙、铁锈，悬浮物等颗粒杂质，吸附水中余氯，有机物等异色、异味。
Filter claims: Reduce rust and sediment, Reduce chlorine and bad taste & odor.
专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 颗粒活性炭滤芯 Carbon Block Cartridges



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-1319H	12 * 40 mesh	3.0 L/min	4000 L	293 * ϕ 70 mm	24pcs

适用机型 Applicable models: KFRO0600UTC-A600
滤除效果: 滤除水中吸附水中余氯，异色、异味、有机物等，改善水质口感。
Filter claims: Remove chlorine , organic chemical , provide taste water.
专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 反渗透膜滤芯 RO Membranes



产品料号 Part Model	规格 Spec	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-3813H	600G	1.5 L/min	2500 L	400 * ϕ 100 mm	9pcs

适用机型 Applicable models: KFRO0600UTC-A600
滤除效果: 滤除水中砷、镉、铬（六价）、铅等重金属；氟化物、硝酸盐氮等无机盐；化学残留物等。
Filter claims: Remove heavy metals such as arsenic, cadmium, chromium (hexavalent), and lead; inorganic salts such as fluoride and nitrate nitrogen; chemical residues.
专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 聚丙烯炭棒复合滤芯 PP Carbon Composite Cartridges



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-5112	5 μ m	3.0L/min	6000L	271 * ϕ 70mm	24pcs

适用机型 Applicable models: KFRO0400UTC-C400
滤除效果: 滤除水中泥沙、铁锈，悬浮物等颗粒杂质，吸附水中余氯，有机物等异色、异味。
Filter claims: Reduce rust and sediment, Reduce chlorine and bad taste & odor.
专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 颗粒活性炭滤芯 Activated Carbon Cartridge



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-1319	12*40mesh	3.0 L/min	4000 L	271 * ϕ 70 mm	24pcs

适用机型 Applicable models: KFRO0400UTC-C400
滤除效果: 滤除水中吸附水中余氯，异色、异味、有机物等，改善水质口感。
Filter claims: Remove chlorine , organic chemical , provide taste water.
专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 反渗透膜滤芯 RO Membranes



产品料号 Part Model	规格 Spec	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-3610	400G	1.05 L/min	4000 L	313 * ϕ 100 mm	9pcs

适用机型 Applicable models: KFRO0400UTC-C400
滤除效果: 滤除水中砷、镉、铬（六价）、铅等重金属；氟化物、硝酸盐氮等无机盐；化学残留物等。
Filter claims: Remove heavy metals such as arsenic, cadmium, chromium (hexavalent), and lead; inorganic salts such as fluoride and nitrate nitrogen; chemical residues.
专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 炭棒滤芯 Carbon Block Cartridges



产品料号 Part Model	过滤粒径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-1210	5 μ m	2 L/min	1500L	271* ϕ 70 mm	24pcs

适用机型 Applicable models: KFRO3-CT508
滤除效果: 吸附水中余氯，异色异味、有机物等。
Filter claims: Remove chlorine , organic chemical .
专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 反渗透膜滤芯 RO Membranes



产品料号 Part Model	规格 Spec	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-3010	50G	0.13 L/min	1500 L	271* ϕ 70 mm	24pcs

适用机型 Applicable models: KFRO3-CT508
滤除效果: 滤除水中砷、镉、铬（六价）、铅等重金属；氟化物、硝酸盐氮等无机盐；化学残留物等。
Filter claims: Remove heavy metals such as arsenic, cadmium, chromium (hexavalent), and lead; inorganic salts such as fluoride and nitrate nitrogen; chemical residues.
专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 颗粒活性炭滤芯 Activated Carbon Cartridge



产品料号 Part Model	过滤粒径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
194-1319	12*40mesh	1 L/min	1000 L	98*60*29 mm	48pcs

适用机型 Applicable models: KFRO3-CT508

滤除效果: 进一步吸附水中余氯, 改善水质口感。

Filter claims: Further remove chlorine and in RO system, it is also used to improve taste.

专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 熔喷聚丙烯滤芯 Mel-blown PP Sediment Cartridges



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-5012	5 μ m	3.0 L/min	4000L	271* ϕ 70mm	24pcs

适用机型 Applicable models: KFRO0100A-B6 / YLR3-6-KFL-635 / KFRO0050A-B6 / KF-WMAF-02

滤除效果: 滤除水中泥沙、铁锈, 悬浮物等颗粒杂质。

Filter claims: Reduce rust and sediment.

专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 颗粒活性炭滤芯 Activated Carbon Cartridge



产品料号 Part Model	过滤粒径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-1319A	12*40 mesh	3.0 L/min	2000 L	271* ϕ 70mm	24pcs
201-1319A	12*40 mesh	3.0 L/min	2000 L	271* ϕ 70mm	24pcs
201-1319B	12*40 mesh	3.0 L/min	2000 L	271* ϕ 70mm	24pcs

191-1319A 适用机型 Applicable models: YLR3-6-KFL-635

201-1319A 适用机型 Applicable models: KFRO0100A-B6 / KFRO0050A-B6

201-1319B 适用机型 Applicable models: KF-WMAF-02

滤除效果: 滤除水中吸附水中余氯, 异色、异味、有机物等, 改善水质口感。

Filter claims: Remove chlorine , organic chemical , provide taste water.

专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 压缩活性炭滤芯 Activated Carbon Cartridge



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-1212	5 μ m	3.0 L/min	2000 L	271* ϕ 70mm	24pcs
191-1210A	5 μ m	3.0 L/min	2000 L	271* ϕ 70mm	24pcs

191-1212适用机型 Applicable models: KFRO0100A-B6 / KFRO0050A-B6 / KF-WMAF-02

191-1210A适用机型 Applicable models: YLR3-6-KFL-635

滤除效果: 吸附水中余氯, 异色异味、有机物等。

Filter claims: Remove chlorine , organic chemical .

专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 反渗透膜滤芯 RO Membranes



产品料号 Part Model	规格 Spec	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-3010	50G	0.13 L/min	1800 L	271* ϕ 70mm	24pcs
191-3210	100G	0.26 L/min	2000 L	271* ϕ 70mm	24pcs
191-3010A	50G	0.13 L/min	2000 L	271* ϕ 70mm	24pcs

191-3010适用机型 Applicable models: KFRO0050A-B6

191-3210适用机型 Applicable models: KFRO0100A-B6

191-3010A适用机型 Applicable models: YLR3-6-KFL-635

滤除效果: 滤除水中砷、镉、铬（六价）、铅等重金属; 氟化物、硝酸盐氮等无机盐; 化学残留物等。

Filter claims: Remove heavy metals such as arsenic, cadmium, chromium (hexavalent), and lead; inorganic salts such as fluoride and nitrate nitrogen; chemical residues.

专利号: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 氧化铝炭纸复合滤芯 Post in line granular activated carbon cartridge



产品料号 Part Model	过滤粒径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-8011	12*40mesh	3.0 L/min	2000 L	271* ϕ 70mm	24pcs

适用机型 Applicable models: KF-WMAF-02

滤除效果: 滤除水中吸附水中余氯, 异色、异味、有机物等, 改善水质口感。

Filter claims: Remove chlorine , organic chemical , provide taste water.

专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

K2 后置活性炭滤芯 Carbon Block Cartridges



产品料号 Part Model	过滤粒径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
191-1319B	12*40mesh	3.0 L/min	2000 L	271* ϕ 70mm	24pcs

适用机型 Applicable models: YLR3-6-KFL-635

滤除效果: 滤除水中吸附水中余氯, 异色、异味、有机物等, 改善水质口感。

Filter claims: Remove chlorine , organic chemical , provide taste water.

专利号 Patent No.: ZL201920089675.6 ZL201920143291.8 ZL201921284881.9

快接式聚丙烯炭棒复合滤芯 Quick-connect PP Carbon Composite Cartridges



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
178-2001	5 μ m	3.0 L/min	4000 L	378 * ϕ 100mm	9pcs

适用机型 Applicable models: KFRO1000A-1
滤除效果: 滤除水中泥沙、铁锈, 悬浮物等颗粒杂质, 吸附水中余氯, 有机物等异色、异味。
Filter claims: Reduce rust and sediment, Reduce chlorine and bad taste & odor.

快接式反渗透膜滤芯 Quick-connect RO Membranes



产品料号 Part Model	规格 Spec	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
178-2002	500G	1.3 L/min	4000 L	378 * ϕ 100mm	9pcs

适用机型 Applicable models: KFRO1000A-1
滤除效果: 滤除水中砷、镉、铬（六价）、铅等重金属; 氟化物、硝酸盐氮等无机盐; 化学残留物等。
Filter claims: Remove heavy metals such as arsenic, cadmium, chromium (hexavalent), and lead; inorganic salts such as fluoride and nitrate nitrogen; chemical residues.

快接式反渗透膜滤芯 Quick-connect RO Membranes



产品料号 Part Model	规格 Spec	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
178-2003	500G	1.3 L/min	4000 L	378 * ϕ 100mm	9pcs

适用机型 Applicable models: KFRO1000A-1
滤除效果: 滤除水中砷、镉、铬（六价）、铅等重金属; 氟化物、硝酸盐氮等无机盐; 化学残留物等。
Filter claims: Remove heavy metals such as arsenic, cadmium, chromium (hexavalent), and lead; inorganic salts such as fluoride and nitrate nitrogen; chemical residues.

快接式后置活性炭滤芯 Quick-connect Post In Line Granular Activated Carbon Cartridges



产品料号 Part Model	过滤粒径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
178-2004	12*40mesh	2 L/min	1000 L	277 * ϕ 67mm	25pcs

适用机型 Applicable models: KFRO1000A-1
滤除效果: 进一步吸附水中余氯, 改善水质口感。
Filter claims: Further remove chlorine and in RO system, it is also used to improve taste.

管道式熔喷聚丙烯滤芯 In-line Melt-blown PP Sediment Cartridges



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
F5633PPW-BOX	5 μ m	3.0 L/min	4000 L	288 * ϕ 67mm	20pcs
F5633PPW-GN	5 μ m	3.0 L/min	4000 L	288 * ϕ 67mm	25pcs

适用机型 Applicable models: KFRO0400A-16N
滤除效果: 滤除水中泥沙、铁锈, 悬浮物等颗粒杂质, 吸附水中余氯, 有机物等异色、异味。
Filter claims: Reduce rust and sediment, Reduce chlorine and bad taste & odor.

管道式活性炭滤芯 In-line Activated Carbon Cartridge



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
F5633CW-BOX	5 μ m	3.0 L/min	9500 L	288 * ϕ 67mm	20pcs
F5633CW-NJ	5 μ m	3.0 L/min	9500 L	288 * ϕ 67mm	25pcs

适用机型 Applicable models: KFRO0400A-16N
滤除效果: 滤除水中吸附水中余氯, 异色、异味、有机物等, 改善水质口感。
Filter claims: Remove chlorine , organic chemical , provide taste water.

快接式氧化铝炭纤维炭纸复合滤芯 Quick-connect Post In Line Granular Activated Carbon Cartridges



产品料号 Part Model	过滤孔径 Filtration	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
AIDRO-10-KF	2 μ m	3.0 L/min	2000 L	263 * ϕ 54mm	20pcs

适用机型 Applicable models: KFRO0400A-16N
滤除效果: 电荷吸附技术, 其流量及载荷量高, 降低低, 吸附异色、异味, 滤除水中重金属（如铅、汞）、细菌（如大肠杆菌）等。
Filter claims: Removes submicron particles through electroadsorption, with high flow rate and low pressure drop, remove different colors and odors, and filters out heavy metals (such as lead and mercury) and bacteria (such as E. coli) in water.


反渗透膜滤芯 RO Membranes



产品料号 Part Model	规格 Spec	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
RO-NCM-2012	200G	0.5 L/min	2300 L	298.2 * ϕ 45mm	9pcs

适用机型 Applicable models: KFRO0400A-16N
滤除效果: 滤除水中砷、镉、铬（六价）、铅等重金属; 氟化物、硝酸盐氮等无机盐; 化学残留物等。
Filter claims: Remove heavy metals such as arsenic, cadmium, chromium (hexavalent), and lead; inorganic salts such as fluoride and nitrate nitrogen; chemical residues.

RO反渗透膜 RO Membranes




产品料号 Part Model	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	包装 Package
KF167-1812-50D	45	298.2	17	30	238	30	25 Pcs
KF167-1812-75D	45	298.2	17	30	238	30	25 Pcs
KF167-1812-100D	45	298.2	17	30	238	30	25 Pcs
KF167-2812-200D	70	298.2	17	30	238	30	9 Pcs
KF167-2812-300D	70	298.2	17	30	238	30	9 Pcs
KF167-2812-400D	72	298.2	17	30	238	30	9 Pcs
KF167-3012-500D	75	298.2	17	12	265	21.2	9 Pcs

产品型号 Model	KF167-1812-50D	KF167-2812-200D	KF167-2812-300D	KF167-2812-400D
稳定脱盐率（%） Stabilized Salt Rejection Rate	98	98	98	98
产水量（GPD）	50	200	300	400
压力（psi）	65	65	80	80

* 上述测试值是基于如下测试条件：250ppm 软化后的自来水，25℃，40%回收率和上述额定的使用压力；单支元件最小脱盐率为95%；单支元件的产水量可能的变化范围±20%；性能规范随产品改进会略有改变。

RO径向流反渗透膜滤芯 RO Membranes

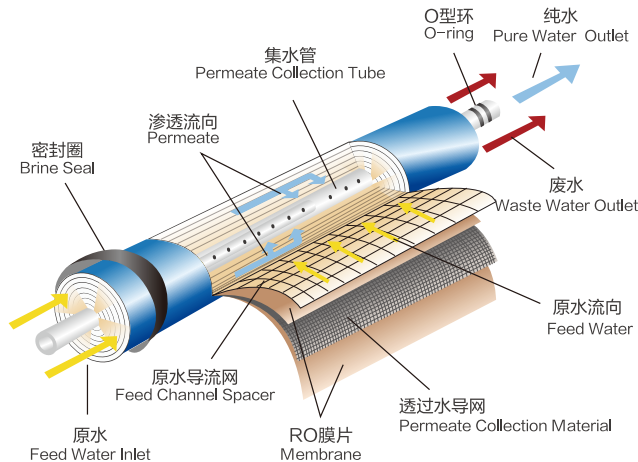

专利号：201920377538.2

产品特点

自动化生产制造卷膜，品质有保障。进口RO膜片，性能稳定，脱盐率与产水量高，同时具有抗生物污染性。过滤孔径万分之一微米，并通过美国国家卫生基金会NSF认证。

Automatic membrane rolling production to ensure consistent quality. The material is from Dow RO membrane sheet with stable conditions, high salt rejection rate and permeated flow rate. Filtration pore size is 0.0001 micron, and it's NSF certified.

聚丙烯熔喷滤芯 Melt-blown PP Sediment Cartridges



PS05-A-3020-NJ

产品料号 Part Number	过滤孔径 Filtration	进水温度 Inlet Temperature	流量 Flow Rate	包装 Package	压降 Pressure Drop	使用寿命 Capacity	滤芯尺寸 L * O.D.
PS05-A-3020-NJ	5 μm	5℃- 38℃ (41°F-100.4°F)	>3.0 L/min	50 Pcs	0.2 - 0.4 bar	1000 G	251 * ϕ60 mm
PS01-A-3020-NJ	1 μm	5℃- 38℃ (41°F-100.4°F)	>3.0 L/min	50 Pcs	0.2 - 0.4 bar	1000 G	251 * ϕ60 mm
270-5512	5 μm	5℃- 38℃ (41°F-100.4°F)	>6.0 L/min	8 Pcs	0.3 - 0.5 bar	3500 G	251 * ϕ115 mm

滤除效果：滤除水中泥沙、铁锈，悬浮物等颗粒杂质。
Reduce rust and sediment.



270-5122

产品料号 Part Number	过滤孔径 Filtration	进水温度 Inlet Temperature	流量 Flow Rate	包装 Package	压降 Pressure Drop	使用寿命 Capacity	滤芯尺寸 L * O.D.
270-5122	20 μm	5℃- 38℃ (41°F-100.4°F)	>10 L/min	4 Pcs	0.3 - 0.5 bar	5000 G	508 * ϕ115 mm
PS05-B-3020-GN-S	5 μm	5℃- 38℃ (41°F-100.4°F)	>5.0 L/min	25 Pcs	0.2 - 0.4 bar	2500 G	508 * ϕ60 mm
PS01-B-3020-GN-S	1 μm	5℃- 38℃ (41°F-100.4°F)	>5.0 L/min	25 Pcs	0.2 - 0.4 bar	2500 G	508 * ϕ60 mm

滤除效果：滤除水中泥沙、铁锈，悬浮物等颗粒杂质。
Reduce rust and sediment.

椰壳颗粒活性炭滤芯 Granular Coconut Activated Carbon Cartridges



产品料号 Part Model	过滤孔径 Filtration	最大流量 Max Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
171-1389	12 × 40 mesh	3.0 L/min	2500 Gallons	251 * ϕ78 mm	25 Pcs

可滤除水中异色、异味、有机化学物质，对氯气、消毒水等进行吸附。
Remove organic compounds, chlorine, improve taste and aroma of water.

后置活性炭滤芯 Post In Line Granular Activated Carbon Cartridges



产品料号 Part Model	进出水口径 In / outlet	流量 Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
171-1356	1/4 "	3.0 L / min	1500 Gallons	254 * ϕ52 mm	25 Pcs

进一步吸附水中余氯，调节pH值，并改善水质口感。
Further remove chlorine and in RO system, it is also used to adjust pH and improve taste.

碳棒滤芯 Carbon Block Cartridges



产品料号 Part Model	过滤孔径 Filtration	最大流量 Max Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
270-1292	10 μm	7.6 L/min	7500 Gallons	510 * ϕ 73 mm	25 Pcs
275-1256	10 μm	3.8 L/min	2000 Gallons	250 * ϕ 73 mm	24 Pcs

碳棒滤芯可滤除氯气、有机化学物等，并可处理多达3.75加仑的水。
Remove organic compounds, chlorine, improve taste and aroma of water.

阴离子交换树脂滤芯 Ion Exchange Resin Cartidges



产品料号 Part Model	过滤孔径 Filtration	最大流量 Max Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package
T33-R-NJ	10-15 μm	4.0 L/min	200 Gallons	251 * ϕ 78 mm	25 Pcs

软化树脂滤芯可滤除水中的钙镁离子。
Remove removes ions of calcium & magnesium.

双截式滤芯 5” 5 μm PP Sediment with 5” Activated Carbon Cartridges



产品料号 Part Model	孔径 Filtration	最大流量 Max Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package	规格 Spec
GAC10N2-NJ	5 μm	7.6 L/min	800 Gallons	250 * ϕ 70 mm	24 Pcs	5微米PP除污+颗粒活性炭 5 μm PP + coconut shell Carbon
GAC11N2	5 μm	7.6 L/min	800 Gallons	250 * ϕ 70 mm	24 Pcs	5微米PP除污+颗粒活性炭 5 μm PP + coconut shell Carbon

可有效滤除泥沙、铁锈、悬浮物，吸附异味。
Remove dirt, sand, rust.

GAC颗粒活性炭滤芯 GAC10N Type Cartridges



产品料号 Part Model	最大流量 Max Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package	规格 Spec
GAC10N	7.6 L/min	2500 Gallons	251 * ϕ 72 mm	24 Pcs	12 × 40目椰壳活性炭填充 Fill in with 12 × 40 mesh Coconut Shell GAC
N-GAC10NBL/KDF	7.6 L/min	3500 Gallons	251 * ϕ 72 mm	24 Pcs	12 × 40目椰壳活性炭 + KDF55 Fill in with 12 × 40 mesh Coconut Shell GAC + KDF 55
GAC10N/R	7.6 L/min	200 Gallons	251 * ϕ 72 mm	24 Pcs	软化交换树脂 Fill in with Ion exchange-resin
GAC11N	7.6 L/min	3000 Gallons	275 * ϕ 72mm	24 Pcs	12 × 40目椰壳活性炭填充 Fill in with 12 × 40 mesh Coconut Shell GAC
GAC11N/R	7.6 L/min	1000 Gallons	275 * ϕ 72mm	24 Pcs	软化交换树脂 Fill in with Ion exchange-resin

GAC椰壳颗粒活性炭滤芯可滤除水中氯、有机化学物质，改善水质口感。
Remove chlorine , organic chemical , provide taste water.

水缘滤芯 Full Flow Cartridges



产品料号 Part Model	最大流量 Max Flow Rate	使用寿命 Longevity	尺寸 L * O.D.	包装 Package	规格 Spec
171-1270	3.0 L/min	2000 L	345 * ϕ 81 mm	1 Pcs	压缩活性炭 Carbon Block cartridge
171-2135	2.0 L/min	1500 L	345 * ϕ 81 mm	1 Pcs	超滤膜+活性炭 UF + CTO (Enhanced)
5095596N001	1.5 L/min	1500 L	345 * ϕ 81 mm	1 Pcs	氧化铝纤维膜+活性炭棒 Alumina fiber membrane +Carbon block

可重复填充滤芯 GAC10NRE Type Reusalbe Cartridges



产品料号 Part Model	最大流量 Max Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package	规格 Spec
GAC10NRR-NJ	7.6 L/min	200 Gallons	251 * ϕ 72 mm	24 Pcs	软化交换树脂 Fill in with Ion exchange-resin
N-GAC20NRC	6.8 L/min	6000 Gallons	509 * ϕ 72 mm	12 Pcs	12 × 40目椰壳活性炭填充 Fill in with 12 × 40 mesh Coconut Shell GAC
N-GAC20NRR	6.8 L/min	450 Gallons	509 * ϕ 72 mm	12 Pcs	软化交换树脂 Fill in with Ion exchange-resin
N-GAC20NRC-KDF-NJ	6.8 L/min	6000 Gallons	509 * ϕ 72 mm	12 Pcs	12 × 40目椰壳活性炭填充+KDF Fill in with 12 × 40 mesh Coconut Shell GAC+KDF

GAC滤芯可滤除水中氯、有机化学物质，改善水质口感。
Remove organic comounds , chlorine , improve taste and aroma of water.

圣烛型陶瓷滤芯 Candle Type Cartridges



产品料号 Part Model	过滤孔径 Filtration	工作流量 Flow Rate	尺寸 L * O.D.	包装 Package
W9120650	0.5 μm	3.5L / min	271 * ϕ 53 mm	25 Pcs

Doulton 陶瓷滤芯将银元素放入陶瓷中烧制，可抑制水中细菌的生长，具有过滤孔径小，可重复刷洗使用的特点。
Remove bacteria & cysts.

Big Blue可重复填充滤芯 Big Blue GAC Type Reusalbe Cartridges



产品料号 Part Model	最大流量 Max Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package	规格 Spec
GAC-BB10C	15 L/min	6000 Gallons	250 * ϕ 114 mm	8 Pcs	12 × 40目椰壳活性炭填充 Fill in with 12 × 40 mesh Coconut Shell GAC
GAC-BB20C	15 L/min	8000 Gallons	513 * ϕ 114 mm	4 Pcs	12 × 40目椰壳活性炭填充 Fill in with 12 × 40 mesh Coconut Shell GAC

GAC滤芯可滤除水中氯、有机化学物质，改善水质口感。
Remove organic comounds , chlorine , improve taste and aroma of water.

PP棉活性炭复合滤芯 PP Activated Carbon Cartridges



产品料号 Part Number	过滤孔径 Filtration	净水流量 Flow Rate	使用寿命 Capacity	包装 Package	尺寸 L * O.D.
270-7191	25 μm	15.2 L/min	3000 G	8 Pcs	247 * ϕ 115 mm
270-1391	25 μm	15.2 L/min	3000 G	8 Pcs	247 * ϕ 115 mm
270-1392	25 μm	30 L/min	6000 G	4 Pcs	502 * ϕ 115 mm
270-1291	5 μm	3.0 L/min	1200 G	25 Pcs	251 * ϕ 60 mm

去除水中泥沙、铁锈、悬浮物等颗粒杂质，有效吸附水中异色异味、余氯、有机物等，改善水质口感。
270-7191款滤芯内含硅磷晶，能有效阻止管道结垢。
Reduce rust and sediment, Reduce chlorine and bad taste & odor.
270-7191: Equipped with phosphorus silicon crystal, Protect pipes against corrosion and scale build-up.

绕线滤芯 PP String Sediment Cartridges



产品料号 Part Number	过滤孔径 Filtration	净水流量 Flow Rate	使用寿命 Capacity	包装 Package	尺寸 L * O.D.
270-9511	15 μm	3.0L/min	3000 G	24 Pcs	251 * ϕ 60 mm
270-9512	15 μm	6.0L/min	7500 G	8 Pcs	251 * ϕ 115mm

纳污力强，去除水中泥沙、铁锈、悬浮物等颗粒杂质。
Dirt holding capacity, Reduces rust and sediment.

折纸滤芯 Origami Cartridges



产品料号 Part Number	过滤孔径 Filtration	端盖颜色 Cap Color	包装 Package	尺寸 L * O.D.
20-23405	5 μm	Blue	24	508 * ϕ 70 mm
20-23420	20 μm	Blue	24	508 * ϕ 70 mm
10-41205	5 μm	Blue	8	251 * ϕ 115 mm
20-41205	5 μm	Blue	4	508 * ϕ 115 mm
20-41220	20 μm	Blue	4	508 * ϕ 115 mm
270-6511	30 μm	Blue	24	251 * ϕ 70 mm
270-6512	30 μm	Blue	8	251 * ϕ 115 mm

去除水中泥沙、铁锈、悬浮物等，可刷洗再次使用。
净水流量与进出水口径、水压、水质条件有关，具体数值以实际测量为准。
Reduce rust and sediment, Reusable wash Polyester Type Cartridge , Re-used by scrubbing cartridge .
Flow rate is affected by In/Outlet size, water pressure and quality. The specific value is subject to measurement.


UDF滤芯 UDF Type Cartridges



产品料号 Part Model	最大流量 Max Flow Rate	使用寿命 Capacity	尺寸 L * O.D.	包装 Package	规格 Spec
UDF10-C	3.8L/min	2000 Gallons	250 * ϕ 65 mm	25 Pcs	12 × 40目椰壳活性炭填充 Fill in with 12 × 40 mesh Coconut Shell Carbon
UDF10-R	3.8L/min	200 Gallons	250 * ϕ 65 mm	25 Pcs	软化交换树脂 Fill in Ion exchange resin

UDF滤芯可滤除水中氯、有机化学物质，改善水质口感。
Remove chlorine, organic chemical, provide taste water.

水龙头滤芯 Faucet Mount Cartridges



产品料号 Part Model	使用寿命 Capacity	尺寸 L × O.D.	包装 Package	规格 Spec
172-1504	500L	100* ϕ 55 mm	2支/盒 (2 Q'ty / Pack) 12盒/箱 (12 Pack / Carton)	椰炭 Coconut Carbon Block
172-2105	500L	100* ϕ 55 mm	3支/盒 (3 Q'ty / Pack) 18盒/箱 (18 Pack / Carton)	椰炭+超滤 Coconut Carbon Block + Hollow Fiber
988-29JD00-1901N	800L	100* ϕ 55 mm	3支/盒 (3 Q'ty / Pack) 18盒/箱 (18 Pack / Carton)	氧化铝纤维碳纸复合 Disruptor

矿泉壶滤芯 Pitcher Cartridges



产品料号 Part Model	使用寿命 Capacity	尺寸 L × O.D.	包装 Package	规格 Spec
173-1802	200L	250* ϕ 130 mm	2支/盒 (2 Q'ty / Pack) 12盒/箱 (12 Pack / Carton)	椰炭+软化树脂 Coconut Carbon Block + Resion
173-2202	200L	250* ϕ 130 mm	3支/盒 (3 Q'ty / Pack) 18盒/箱 (18 Pack / Carton)	椰炭+超滤 Coconut Carbon Block + Hollow Fiber

沐浴宝滤芯 Shower Cartridge



产品料号 Part Model	滤材 Cartridges	使用寿命 Capacity	原水水质 Water Source	尺寸 L × O.D.	包装 Package
KF-SHWR-F	KDF	3000 Gallons	市政自来水 Tap water	140* ϕ 85 mm	24 Pcs

出水流量的大小与进水压力及花洒的规格有关。
Outlet flow rate will be related to the inlet pressure and the specifications of the shower.

除垢器专用硅磷晶 Phosphorus Sillicon Crystal



产品料号 Part Model	原水水质 Water Source	净重 Net weight	包装 Package
370-7001	市政自来水 Tap water	125g	24 Pcs
390-7003	市政自来水 Tap water	105g	24 Pcs
390-7002	市政自来水 Tap water	545g	12 Pcs

注 意：
滤芯使用寿命的长短与当地的水质及用水量有关。
进水压力： 0.1-0.4Mpa
进水温度： 5- 38℃ (41-100.4°F)

NOTE:
Cartridge longevity and performance depend on water usage and level of contamination.
Max.Working Pressure: 0.1 - 0.4 Mpa
Max.Working Temperature: 5- 38℃ (41-100.4°F)

零配组件
Accessories

品质卓越 坚固耐用 Excellent quality, strong and durable

压力储水桶 Pressure Storage Tank



PRO2000



PRO3000-NJ



PRO4000W-NSF-GN



PRO100BL




PRO200BL-PA


产品型号 Part Model	容量 Capacity	高度 Height	直径 O.D.	进出水口径 In/outlet	工作温度 Max.Working Temp
PRO2000	2.0 Gal	335 mm	220 mm	3/8 " NPT	2℃- 45℃
PRO3000-NJ	3.0 Gal	370 mm	243 mm	1/4 " NPT	2℃- 45℃
PRO3200	3.2 Gal	444 mm	278 mm	1/4 " NPT	2℃- 45℃
PRO4000W-NSF-GN	4.0 Gal	397 mm	284 mm	1/4 " NPT	2℃- 45℃
PRO100BL	11 Gal	580 mm	270 mm	3/4 " NPT	2℃- 45℃
PRO200BL-PA	20 Gal	680 mm	380 mm	3/4 " NPT	2℃- 45℃

注：PRO100BL和PRO200BL-PA为铁桶设计

充水容量与压力对照表
Capacity & Pressure check list

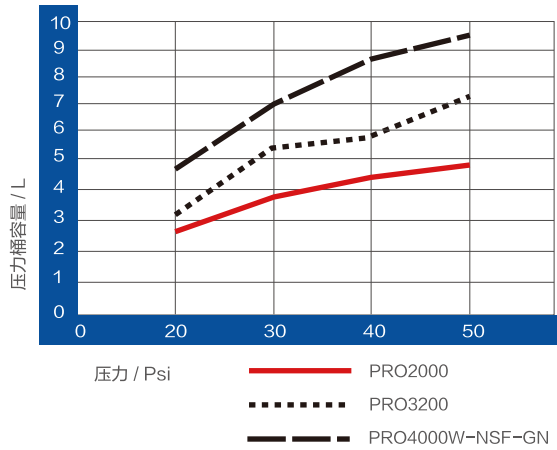

专为RO系统设计，多种规格选择，正放或侧放均可正常工作
采用耐用的PP材质制成，结实耐用。
美国联邦食品药品监督管理局(FDA)表列食品级材质制作，安全有信心。
本产品通过美国国家卫生基金会(NSF)认证测试合格。

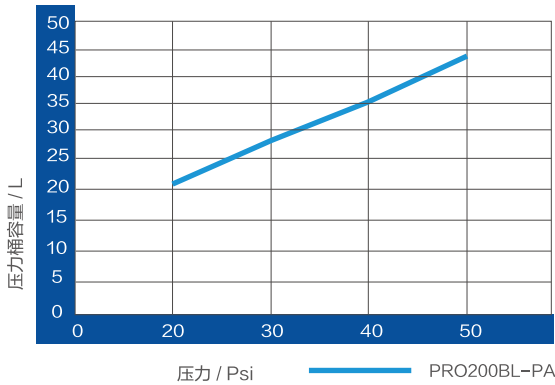

Designed for RO system with different specifications, and
can be installed upright or on its side.
The material is PP (Polypropylene), strong and enduring.
The material is FDA certified to ensure safety.
The product is NSF certified.

鹅颈水龙头 Faucets



智能水龙头
955-440000-1201N
Smart faucet w/LED



陶瓷鹅颈龙头
SMFU06
Ceramic faucet



单出水
955-44DCL-1200N
Single outlet faucet



进水/纯净水双出水
955-44SGSC-1200N
Dual outlet faucet



橱柜下型加热器配用
双温水龙头
955-440003-1200N
Undersink heater faucet

产品型号 Part Model	旋转半径 Turning Radius	台面上龙头高度 Faucet Height above the table	接口尺寸 Interface Size
955-440000-1201N	16 cm	33 cm	1/4 "
955-44SGSC-1200N	13 cm	26 cm	1/4 "
955-440003-1200N	16 cm	33 cm	1/4 "
WDF-103CH	14 cm	23 cm	1/4 "
SMFU06	11 cm	26 cm	1/4 "

扳手 Wrench



273-070004-3400D
10 " 多功能扳手
10 " Multi-wrench



WR-200W
10 ", 20 " KF滤瓶使用
10 ", 20 " housing wrench



WR-ST3
10 " 滤瓶扳手
10 " housing wrench



WR-APC
APC滤瓶扳手
APC Housing wrench



WHKF-WRC
多功能扳手
Strap housing wrench



271-WR100NW-3400D
10 " EG, YT, APO 滤瓶使用
10" EG/YT/APO housing wrench



WR-500B2
10 ", 20 ", 1050及20050滤瓶使用
4" housing wrench(for big blue housings)

控制类 Control Valve



SV-1000N
24VDC, 160mA
1/4 " 电磁阀
1/4 " 24 VDC solenoid valve



LP1000
低压压力开关
Low pressure switch



LP-1000Q
低压压力开关 (快速接头)
Low pressure switch w/ speed fittings



HP1000
高压压力开关
High pressure switch



HP-1000Q
高压压力开关 (快速接头)
High pressure switch w/speed fittings

净水器安装套件 Installation Accessories



FT-06
延长接头
1/2 " MNPT × 1/2 " FIP



SEWBV1414/SEWBV1438
铜球阀



球阀